

Ex06.

..... 3

..... 3

..... 3

/ 4

..... 5

..... 6

..... 7

..... 8

..... 9

..... 10


..... 11

..... 13


..... 14

Ex06.

1.
 -
 -
 - 1
 - : 30 °
2.
 - AISI1025(T=20°C)
 -
 - : 10.0mm × 30.0mm
 - :
3.
 - :
 - : Cold_Normal_lubrication_Hybrid
 - :
 - : -1.0 mm/s
 - : 0.0 mm/s



소재의 초기형상

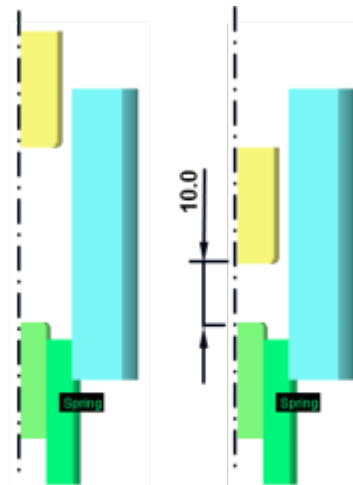

금형의 초기 위치


금형의 최종 위치

<단조공정도>




1. AFDEX


2. (), (), (), (3), (Newton), (), (), (), & () “ “ .
/

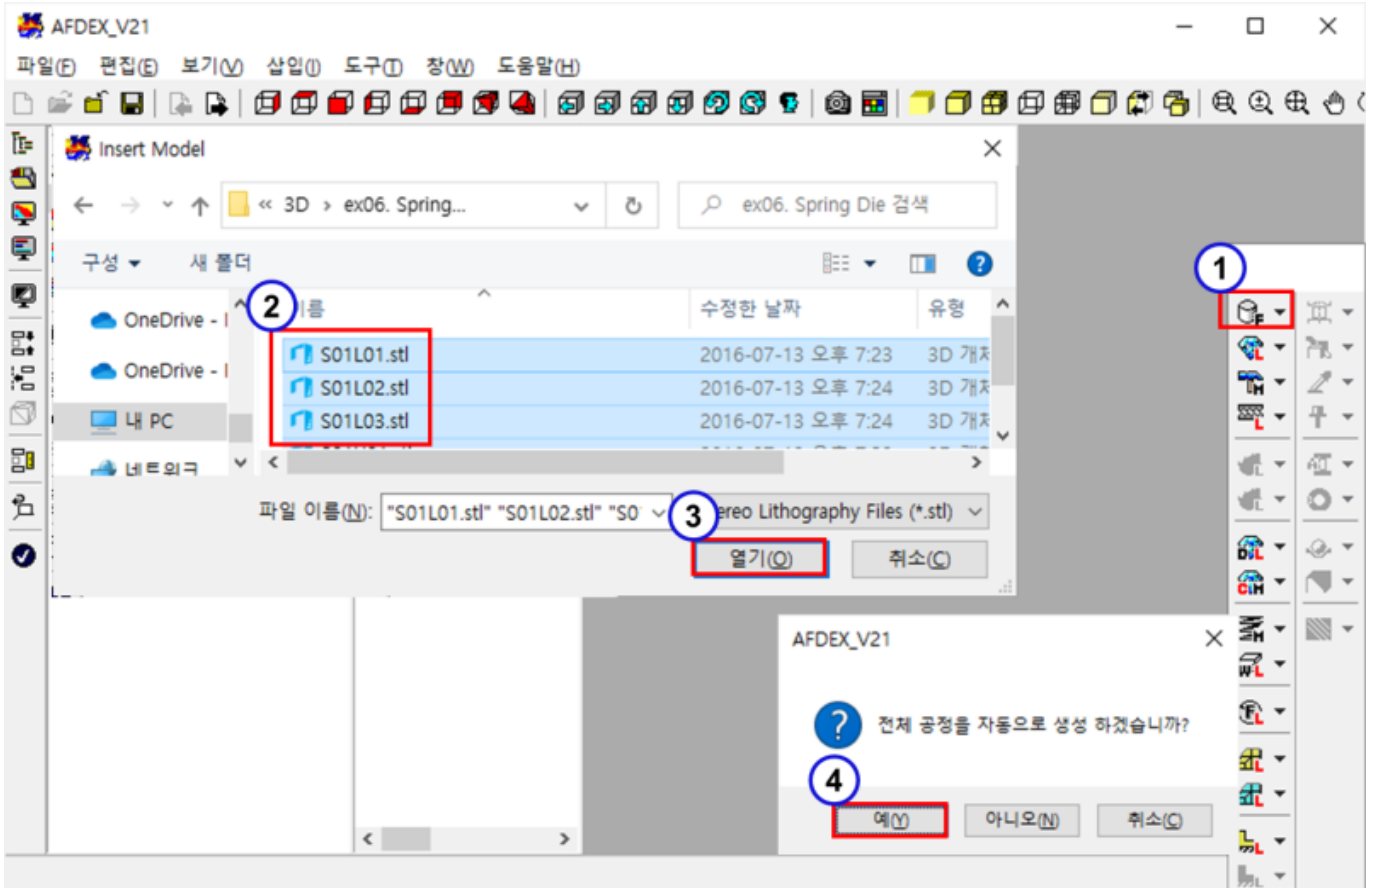


1. “ : 가 ”
2. \AFDEX_Example\3D\ex06. Spring Die “*.stl”
3. “ ”
4. 가 , “ ”

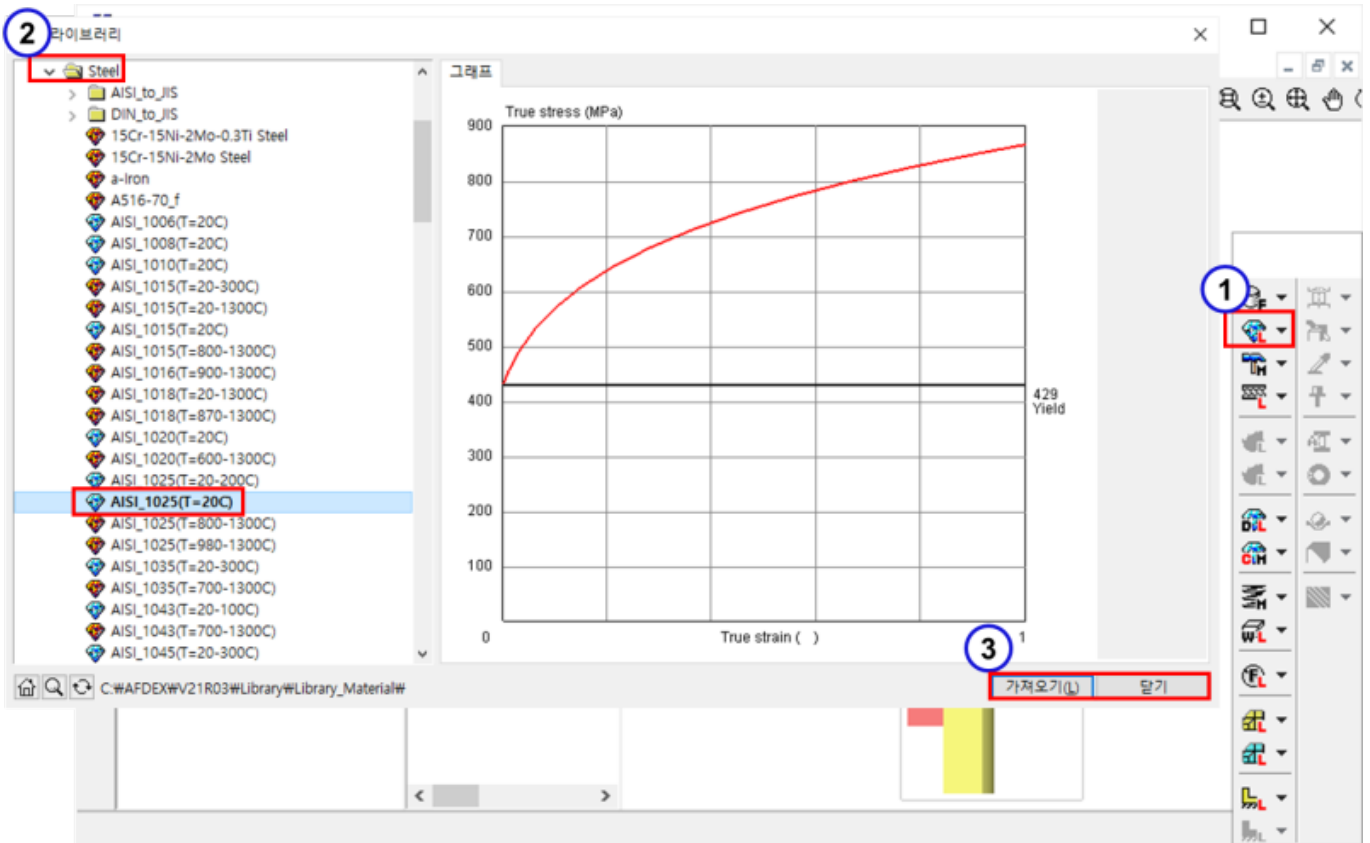


1. “ ” : 가 ” .
2. “Steel → AISI1025(T=20C)” .
3. “ 가 ” , “ ” .

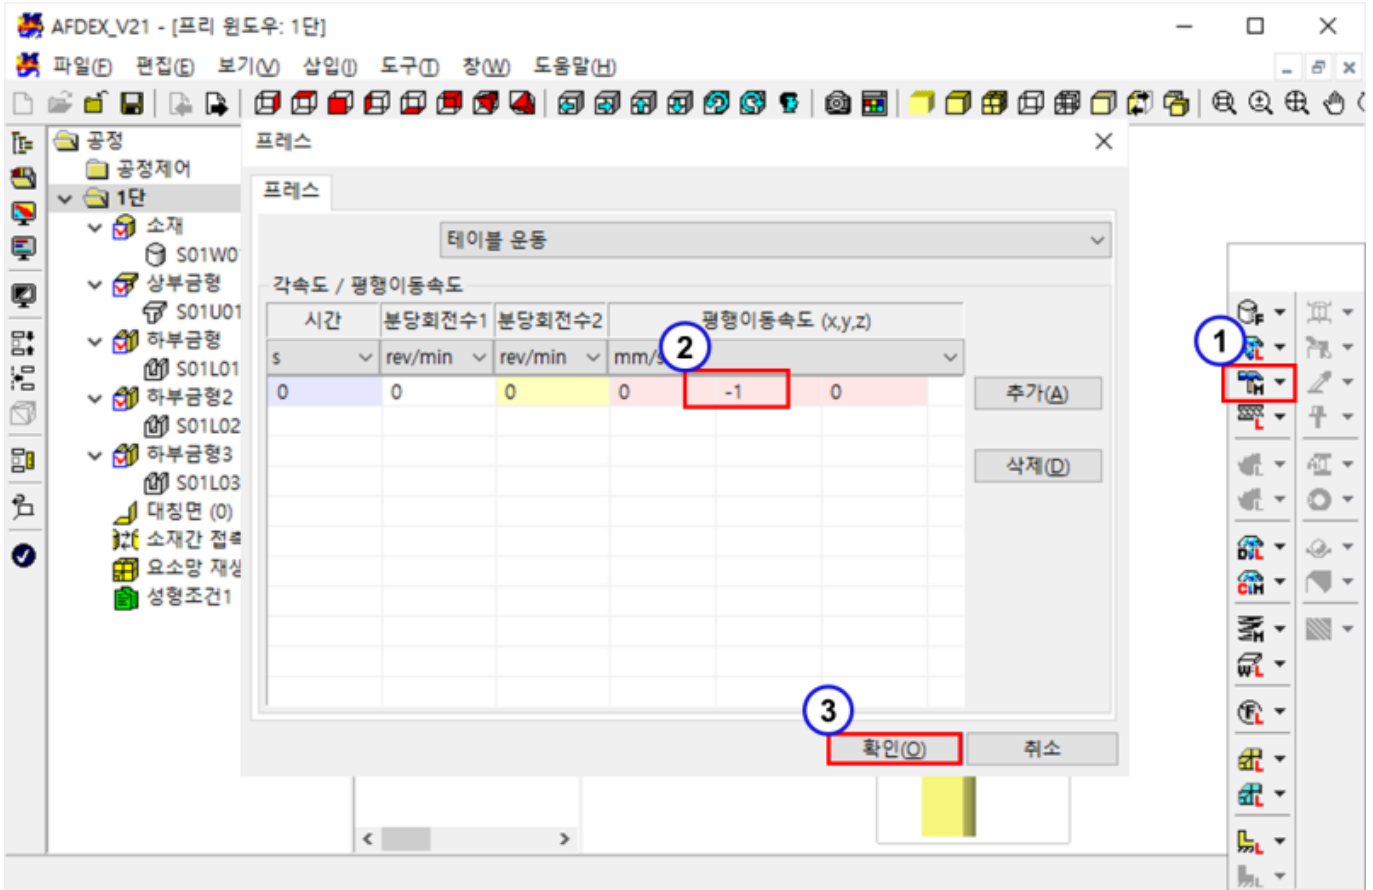


1. “ : ”
2. Y “ -1.0 ”
3. “ ”

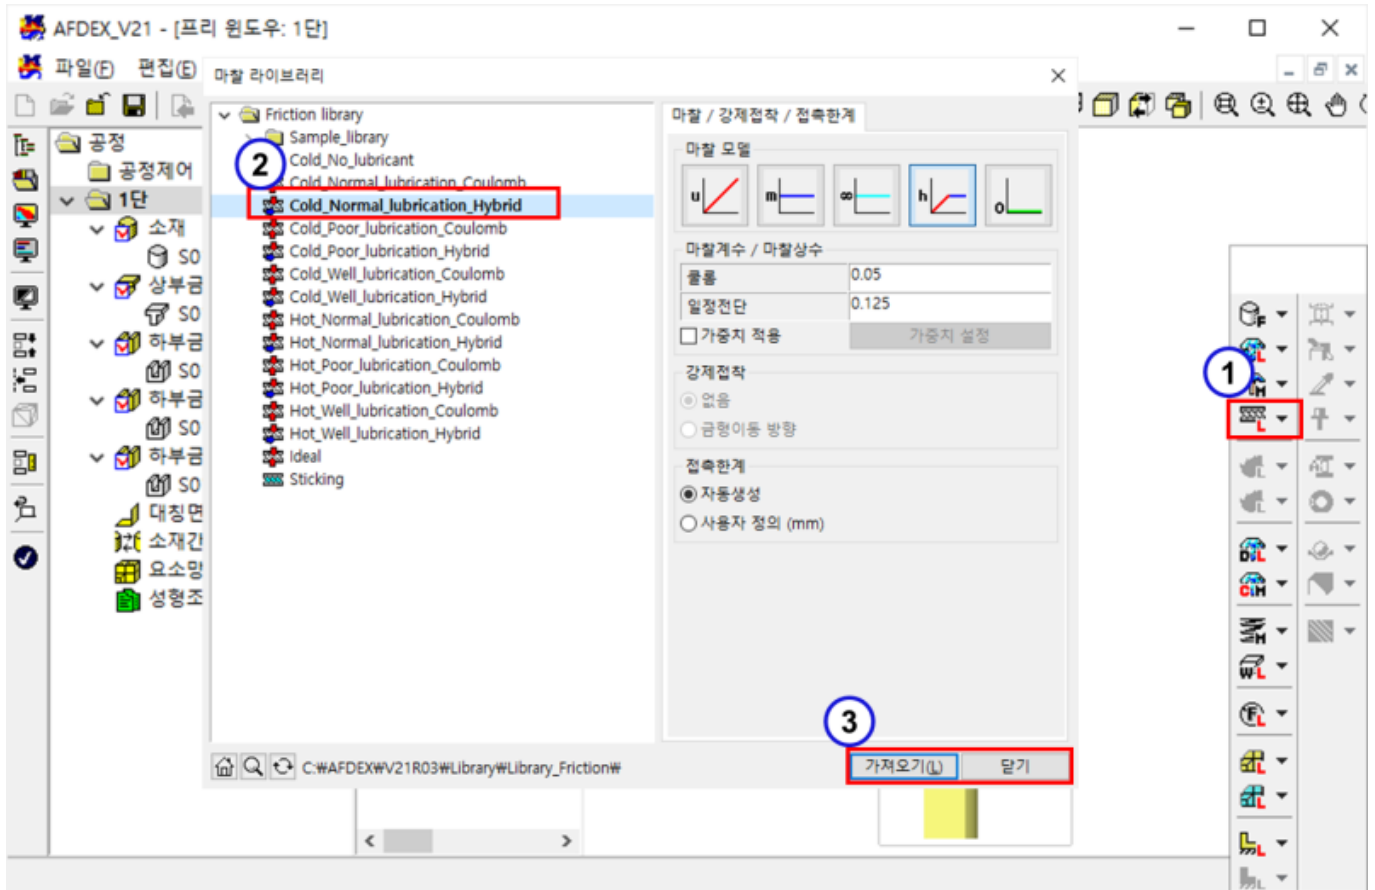


1. “ ” 가 .
2. “Cold_Normal_lubrication_Hybrid” .
3. “가 ” , “ ” .

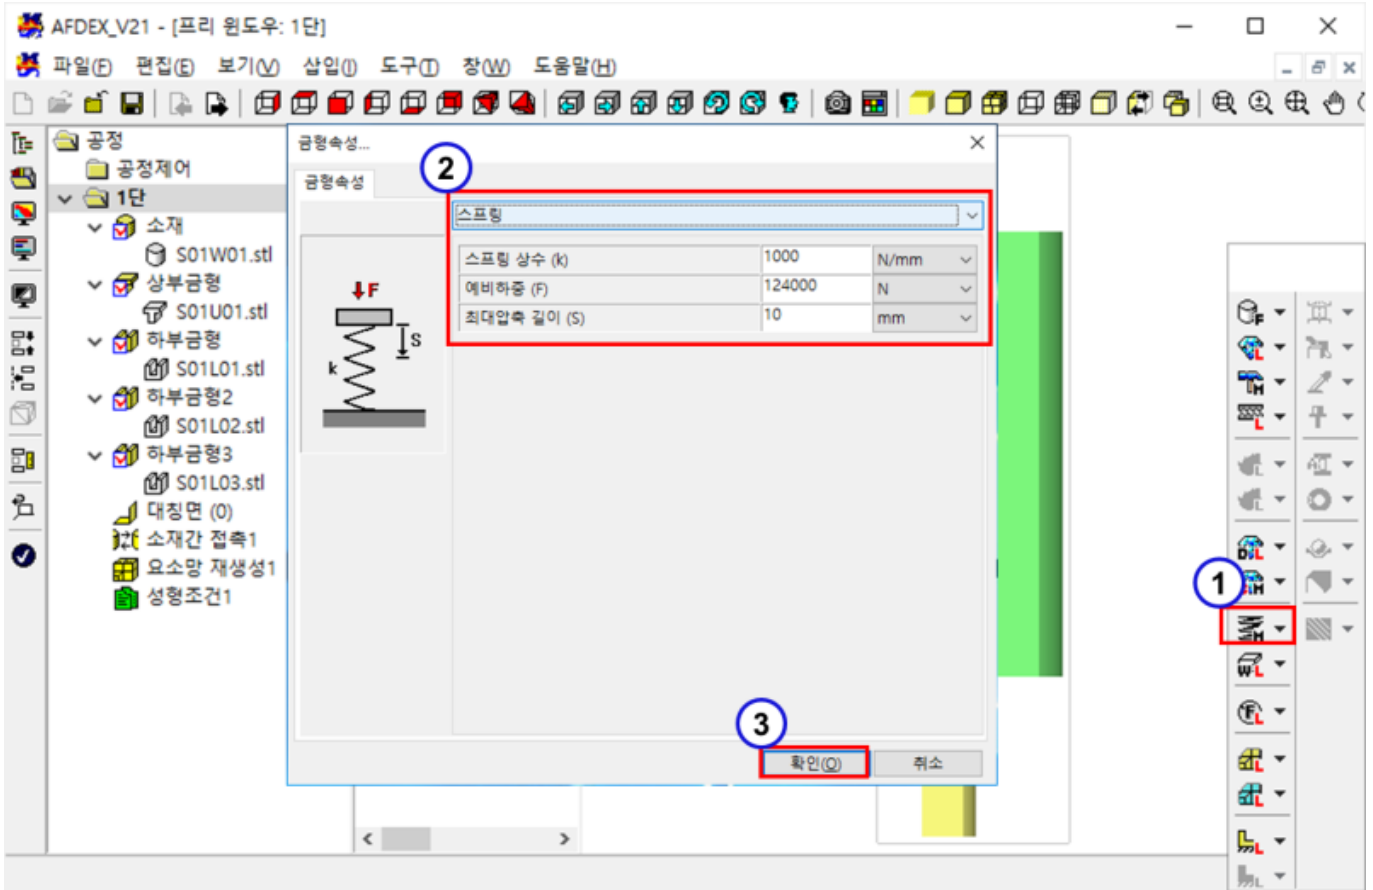


1. “ ”
2. “ ”
3. “ ”

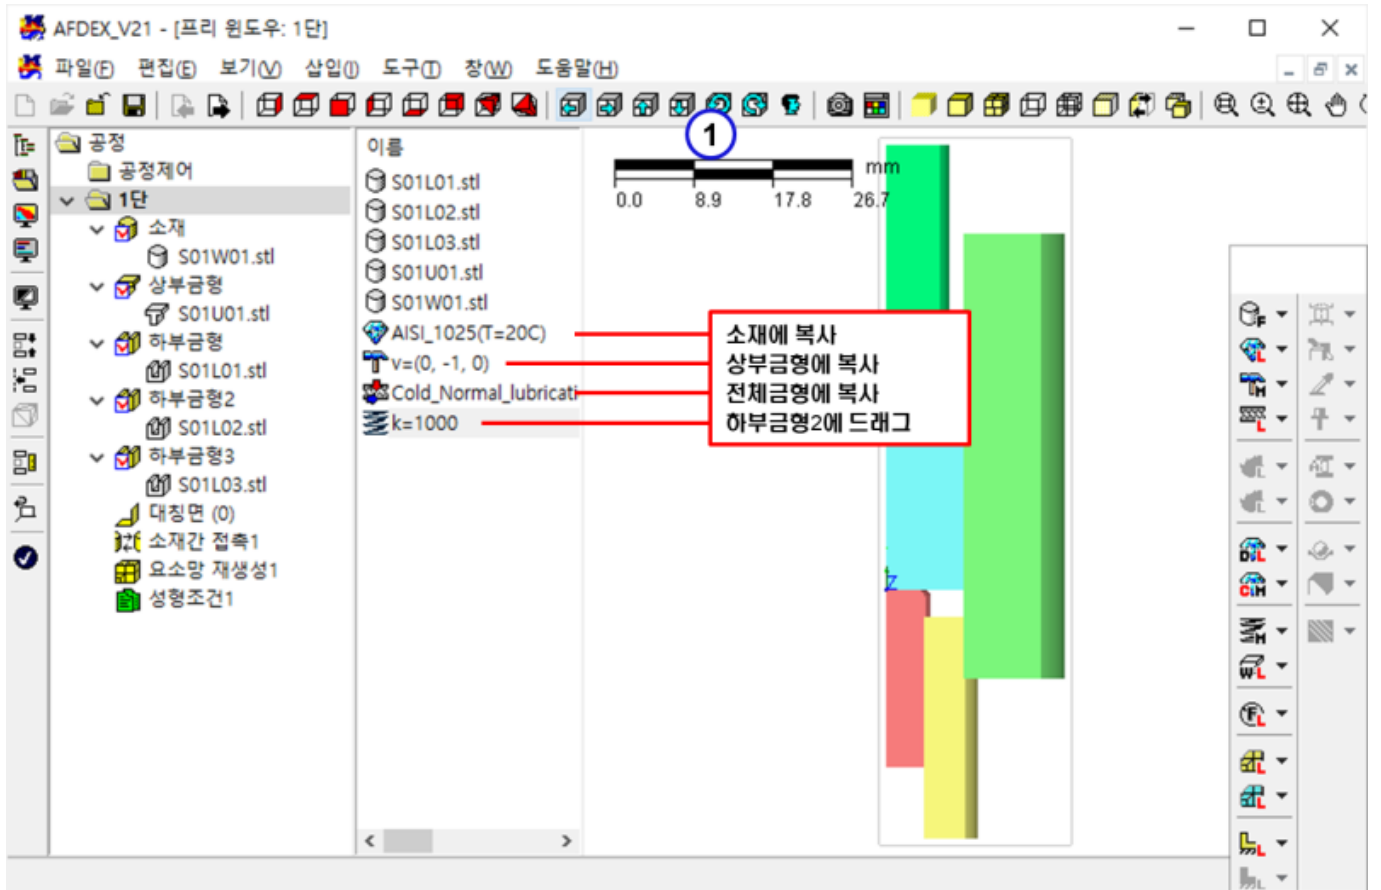


1. , / / .

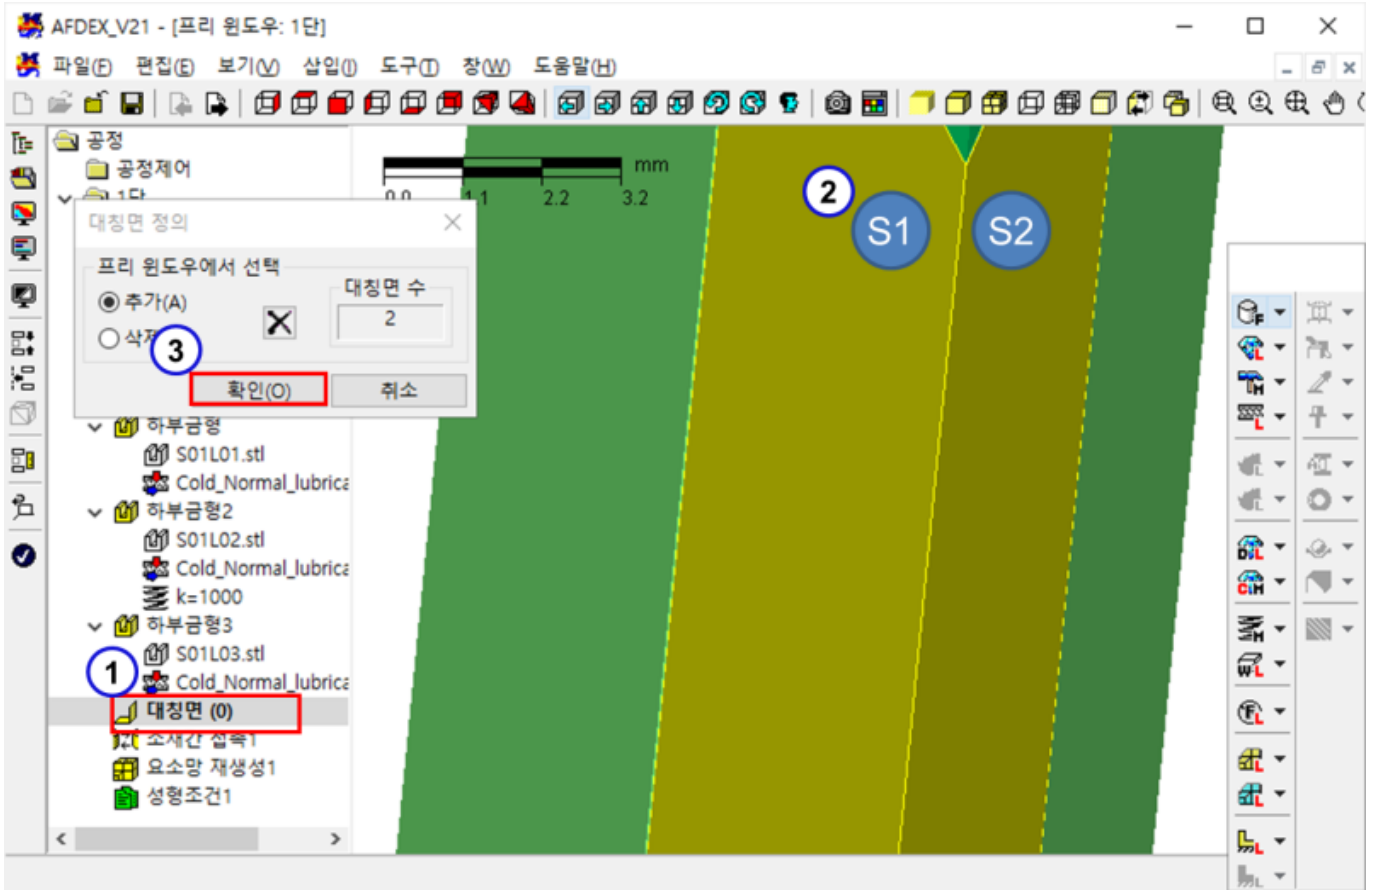


- 1. “ (0) ”
- 2. S1, S2
- 3. “ ”

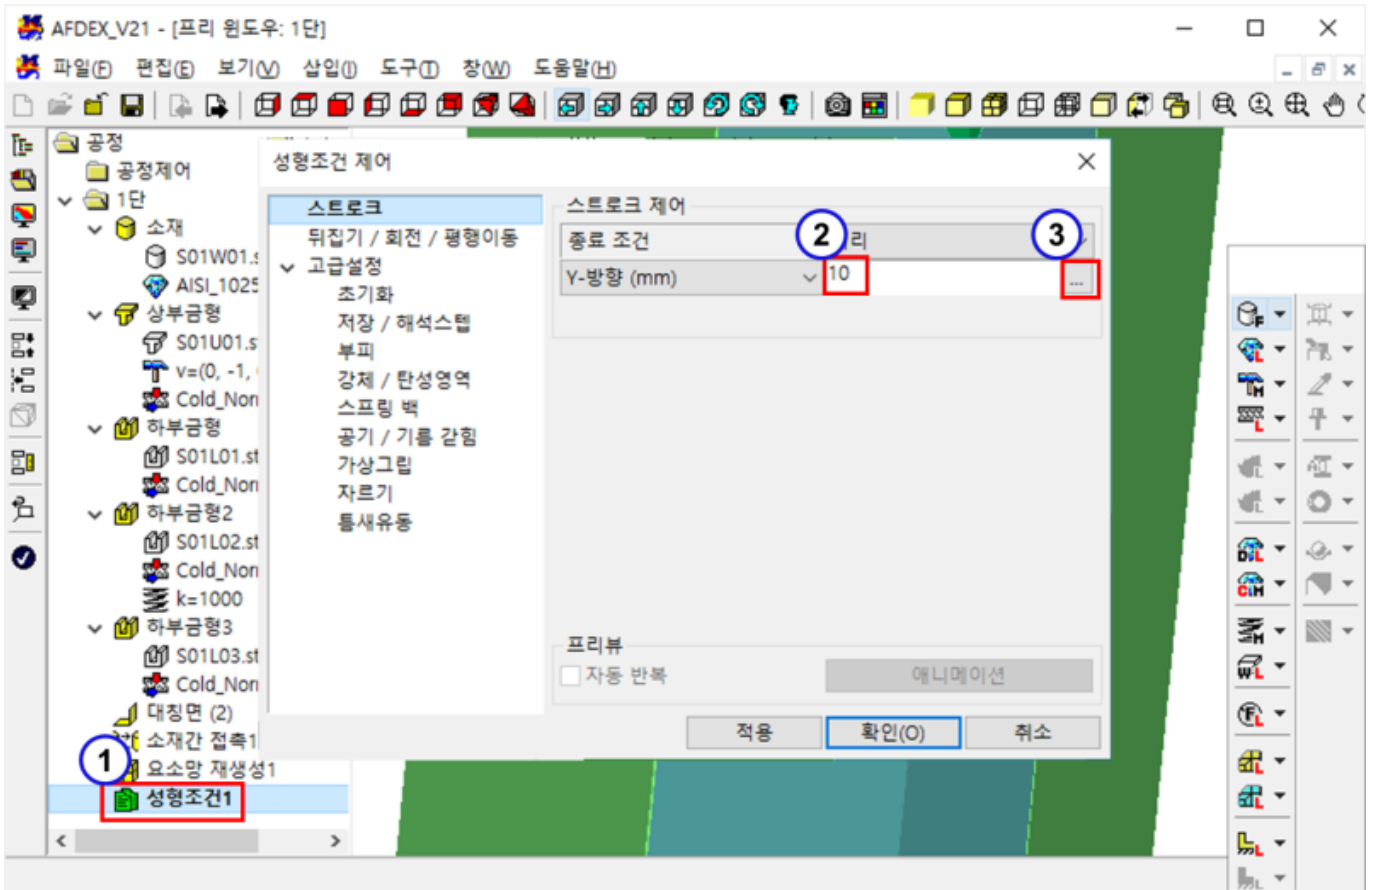


1. “ 1 ”
2. “ ” , “ 10 ”
3. “ . . . ”

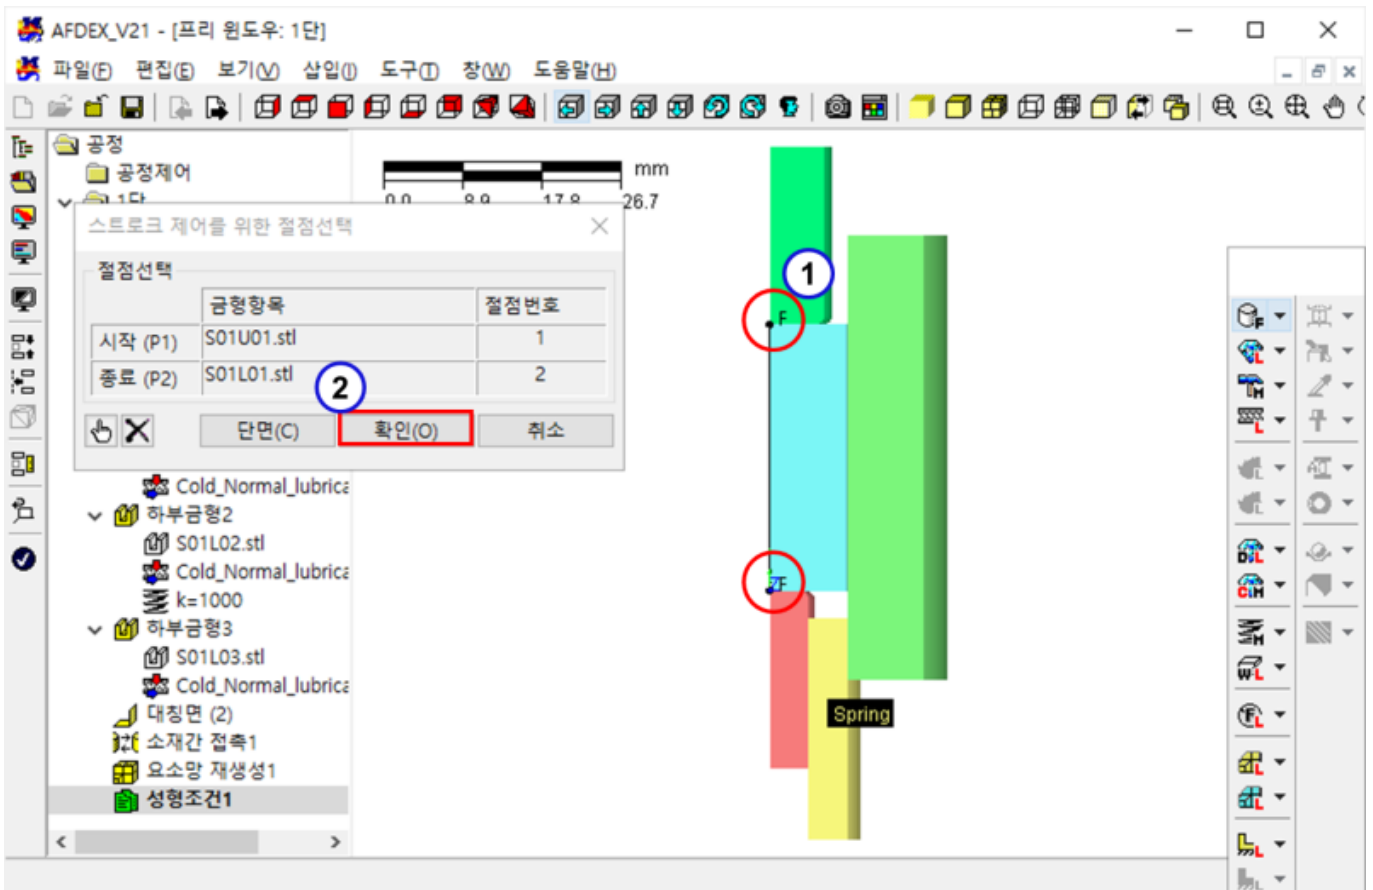


- 1. P1 P2
- 2. “ ”

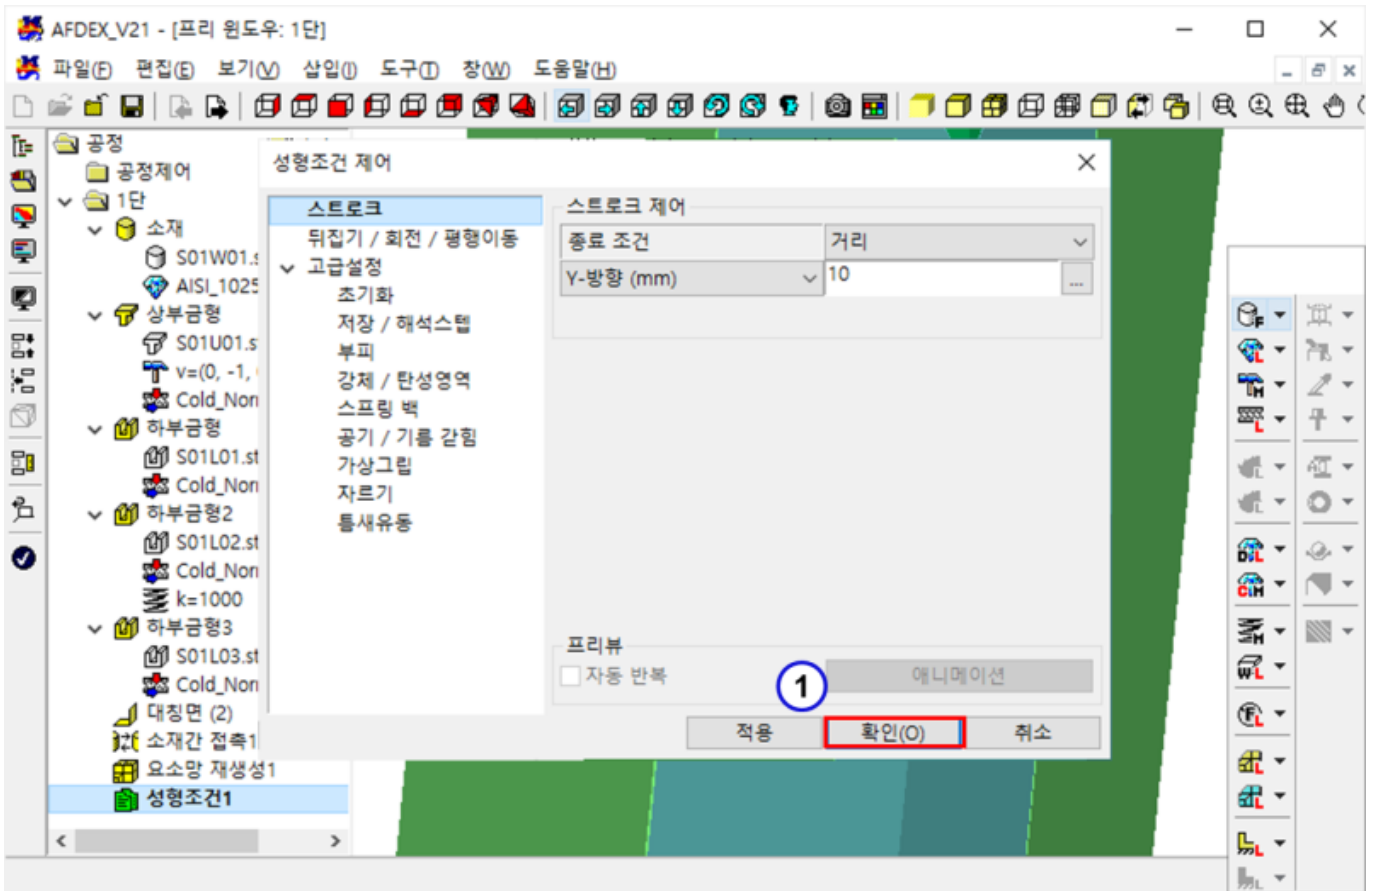

- 1. “ ”

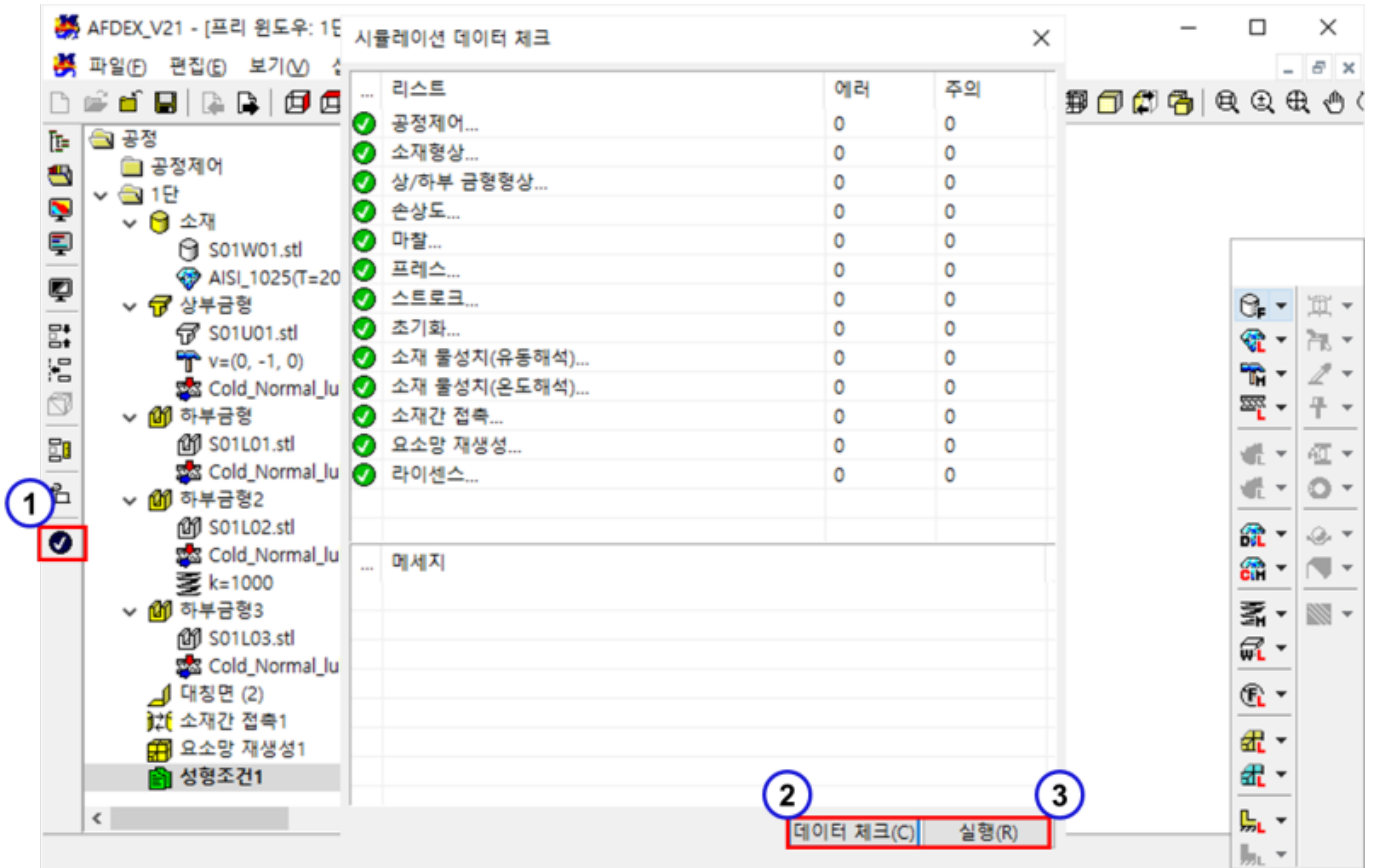

1. Toolbar “ / ” .
2. “ ” .
3. “ ” .

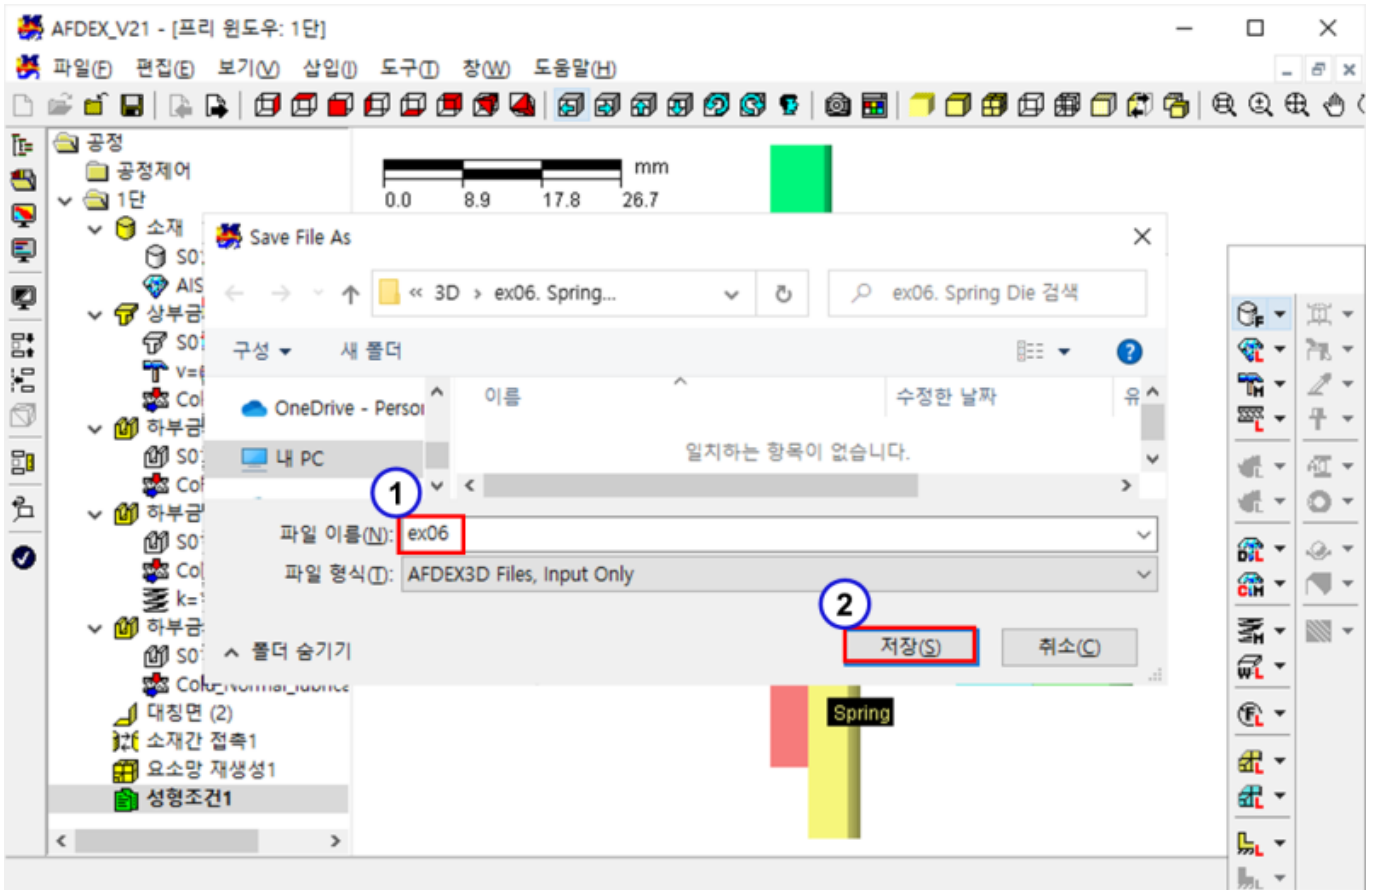

1. Ex06

2. “ ”

From:

<https://edu.afdex.com/> - **AFDEX**

Permanent link:

<https://edu.afdex.com/doku.php?id=basic:ex06>

Last update: **2025/02/26 06:20**

